

Krantz Enterprises, dba



14807 US HWY. 290 E. AUSTIN (MANOR), TX 78653
(512) 278-9998 FAX (512) 278-9986
www.KrantzRecoveredWoods.com

Reclaimed Longleaf Pine specifications:


- Virgin growth Longleaf Pine timbers & beams salvaged from deconstructed pre-1925 buildings. Also referred to as Antique Heart Pine.
- Colors are orange, brown, and red tones with some yellow sap streaks.
- At least 75% heartwood. Approximate moisture content is 12%.
- Dimensions: Flooring: 7/16" to 3/4" x 2-1/4" to 7" face or custom. Lumber: 3/4" to 1-1/2" x 2-1/2" to 7-1/4" or custom. Beams: 4x4 to 12x12x24' according to availability.
- Hardness is 1225 on the Janka scale, comparable to Red Oak (1290).
- Flooring is ordered by the linear foot and is trimmed to provide 100 percent usable material for the grade. Lengths are random, 2' and longer. Standard milling is T&G center-match pattern with equal wood above and below the tongue. The tongue is tapered to ease installation.
- Custom milling patterns and specific lengths are available for a premium.
- Grades:

Common grade is a blend of vertical and arching grain. It includes unlimited size and number of knots, nail holes, bolt holes, staining, and slight cracking and checking for a distressed look. No loose knots.

Select grade is a blend of vertical and arching grain. It includes a few small knots and nail and/or bolt holes. No loose knots.

Old Face grade is same as Common grade, but with one side "hit and miss" planed, showing the old reclaimed timber's patina, including circle or band saw or planer marks.

Vertical grade has a fine, delicate straight grain, no growth rings more than 45 degrees perpendicular to the face of the board. It includes almost no knots, nail and/or bolt holes. Widths up to 5" and lengths of 4' minimum. No loose knots.

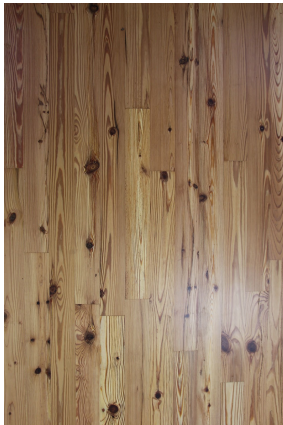

Common



Select



Old Face



Vertical

Wood, the way it used to be.